

**S3C****AC Solid State Relay**

# S3




**S E R I E S**

**Features**

- All type have common dimensions
- LED installed
- Dielectric strength between input and output at 3,000V/1 min.
- Built-in varistor (surge absorb element)
- UL, C-UL, VDE standard approved
- Terminal safety cover installed
- Optional heat-sink available (P96)

**Type Information**


S    3    C    -    2    1    5    W    D    V									
Zero-cross-circuit	C : Built-in	Standard load voltage	2 : 100V, 200V	Max. load current	15 : 15A	Input voltage range	WDV : DC3.5 ~ 30V		
			4 : 400V		25 : 25A		ADV : 85 ~ 264V		
					35 : 35A				
					45 : 45A				

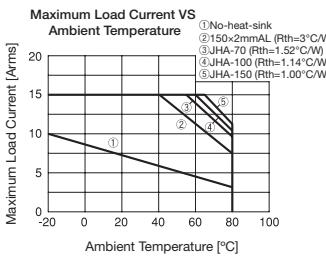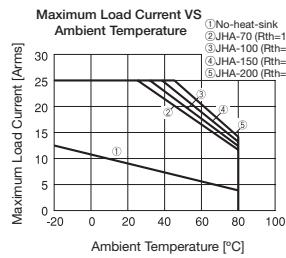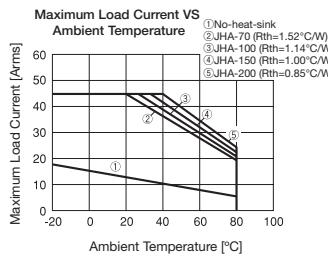**Characteristics****S3C-215WDV****S3C-225WDV****S3C-245WDV**


※ Description in the catalogue is subject to change without notice. Please read the specifications thoroughly before using.  
※ Please contact JEL SYSTEM for further information.

## Characteristics


S3C-425WDV

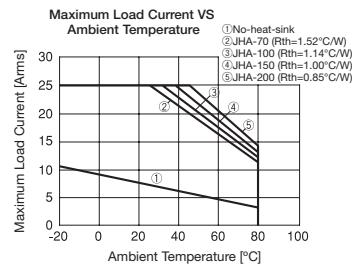

S3C-435WDV

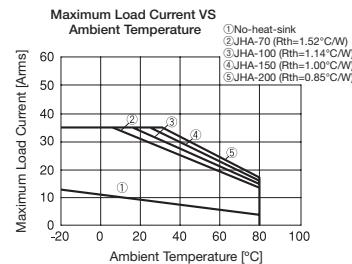

## Dimensions (mm)

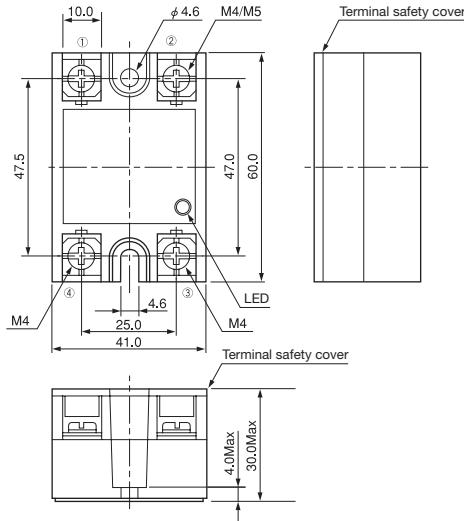

※ Torque range

M4 terminal 1.5 N·m (MAX)


M5 terminal 2.0 N·m (MAX)

Outer case 1.5 N·m (MAX)


Terminal number	Terminal size	
	S3C-215	S3C-245
① (Output)	M5	
② (Output)		M4
③ (Input +)		M4
④ (Input -)		

## Equivalent Circuit


S3C-2□□ WDV

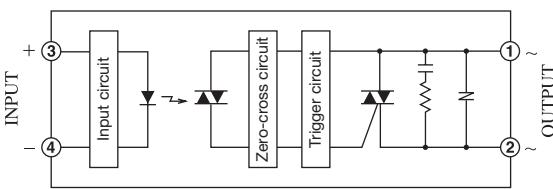

S3C-2□□ ADV

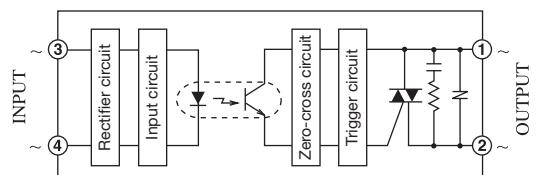

S3C-4□□ WDV

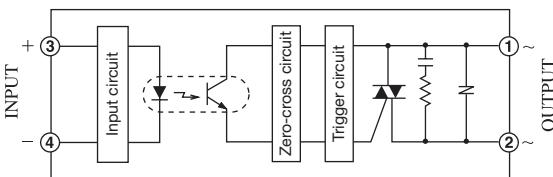

※ Description in the catalogue is subject to change without notice. Please read the specifications thoroughly before using.

※ Please contact JEL SYSTEM for further information.

## ■ Ratings

(Ta = 25 °C)

	Item	Symbols	S3C-215WDV	S3C-225WDV	S3C-245WDV	S3C-215ADV	S3C-225ADV	S3C-245ADV	Units			
Output	Rated Load Voltage	—	120、240						V <sub>ACrms</sub>			
	Maximum Load Current	I <sub>OMAX</sub>	15	25	45	15	25	45	A <sub>ACrms</sub>			
	Peak Repetitive Off State Voltage	V <sub>DRM</sub>	387(varistor voltage 430V)						V			
	Peac 1 Cycle Surge Current	I <sub>SURGE</sub>	150(50Hz)	225(50Hz)	440(50Hz)	150(50Hz)	225(50Hz)	440(50Hz)	A			
	Frequency	f	50、60						Hz			
Input	Maximum Input Voltage	V <sub>IMAX</sub>	30			264 (V <sub>ACrms</sub> )			V <sub>DC</sub>			
	Maximum Input Current	I <sub>IMAX</sub>	10			5 (mA <sub>AC</sub> )			mA <sub>DC</sub>			
General	Dielectric Strength	V <sub>ISO</sub>	3,000/1min.(Between input-output-case)						V <sub>ACrms</sub>			
	Isolation Resistance	R <sub>ISO</sub>	10 <sup>8</sup> and above DC500V(Between input-output-case)						Ω			
	Operating Temperature Range	T <sub>OPR</sub>	−20～+80						℃			
	Storage Temperature Range	T <sub>STG</sub>	−30～+100						℃			

## ■ Electrical Characteristics

(Ta = 25 °C)

	Item	Symbols	S3C-215WDV	S3C-225WDV	S3C-245WDV	S3C-215ADV	S3C-225ADV	S3C-245ADV	Units			
Output	Load Voltage Range	V <sub>O</sub>	35～264						V <sub>ACrms</sub>			
	Off State Leakage Current	I <sub>LEK</sub>	12 and below(V <sub>O</sub> =200V)						mA <sub>ACrms</sub>			
	On State Voltage Drop	V <sub>SAT</sub>	1.5 and below						V <sub>ACrms</sub>			
	Minimum Load Current	I <sub>OMIN</sub>	100						mA			
Input	Input Voltage Range	V <sub>I</sub>	3～30 (T <sub>OPR</sub> = 0～+80 °C)		85～264 (V <sub>ACrms</sub> )			V <sub>DC</sub>				
			3.5～30 (T <sub>OPR</sub> = −20～0 °C)									
	Operate Voltage	V <sub>P</sub>	3 and below(T <sub>OPR</sub> = 0～+80°C)		85 and below(V <sub>ACrms</sub> )			V <sub>DC</sub>				
			3.5 and below(T <sub>OPR</sub> = −20～0°C)									
General	Release Voltage	V <sub>D</sub>	1 and above			30 and above(V <sub>ACrms</sub> )			DC			
	Operate Time	T <sub>ON</sub>	1/2 Cycle +1ms and below			1 1/2 Cycle +1ms and below			/\			
	Release Time	T <sub>OFF</sub>	1/2 Cycle +1ms and below			1 1/2 Cycle +1ms and below			/\			
	Capacitance	C <sub>O</sub>	15 and below						PF			
	Zero Cross Turn On		Built In						/\			
Approved Standards			UL、C-UL、VDE			—			/\			

※ Description in the catalogue is subject to change without notice. Please read the specifications thoroughly before using.

※ Please contact JEL SYSTEM for further information.

**■ Ratings**

(Ta = 25 °C)

	Item	Symbols	S3C-425WDV	S3C-435WDV	Units
Output	Rated Load Voltage	—	440		VACrms
	Maximum Load Current	I <sub>OMAX</sub>	25	35	AACrms
	Peak Non Repetitive Off State Voltage	V <sub>DSM</sub>	819(varistor voltage 910V)		V
	Peac 1 Cycle Surge Current	I <sub>SURGE</sub>	230(50Hz)	350(50Hz)	A
	Frequency	f	50、60		Hz
Input	Maximum Input Voltage	V <sub>IMAX</sub>	30		V <sub>DC</sub>
	Maximum Input Current	I <sub>IMAX</sub>	25		mA <sub>DC</sub>
General	Dielectric Strength	V <sub>Iso</sub>	3,000/1min.(Between input and output) 2,500/1min.(Between input and case or output and case)		VACrms
	Isolation Resistance	R <sub>Iso</sub>	10 <sup>8</sup> and above DC500V(Between input-output-case)		Ω
	Operating Temperature Range	T <sub>OPR</sub>	−20～+80		℃
	Storage Temperature Range	T <sub>STG</sub>	−30～+100		℃


**■ Electrical Characteristics**

(Ta = 25 °C)


	Item	Symbols	S3C-425WDV	S3C-435WDV	Units
Output	Load Voltage Range	V <sub>O</sub>	60～528		VACrms
	Off State Leakage Current	I <sub>LEK</sub>	12 and below(V <sub>O</sub> =400V)		mA <sub>ACrms</sub>
	On State Voltage Drop	V <sub>SAT</sub>	15 and below		VACrms
	Minimum Load Current	I <sub>OMIN</sub>	100		mA
Input	Input Voltage Range	V <sub>I</sub>	3～30		V <sub>DC</sub>
	Operate Voltage	V <sub>P</sub>	3 and below		V <sub>DC</sub>
	Release Voltage	V <sub>D</sub>	1 and above		V <sub>DC</sub>
General	Operate Time	T <sub>ON</sub>	1/2 Cycle +1ms and below		
	Release Time	T <sub>OFF</sub>	1/2 Cycle +1ms and below		
	Capacitance	C <sub>IO</sub>	15 and below		PF
	Zero Cross Turn On		Built In		
	Approved Standards		—		

\* Description in the catalogue is subject to change without notice. Please read the specifications thoroughly before using.  
 \* Please contact JEL SYSTEM for further information.


S3C-215

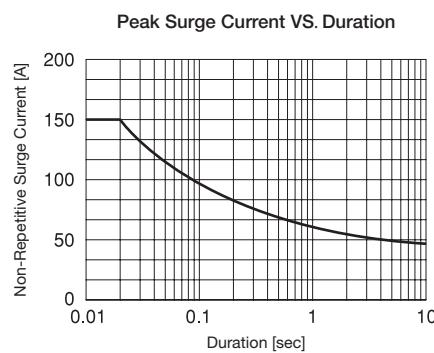


S3C-225

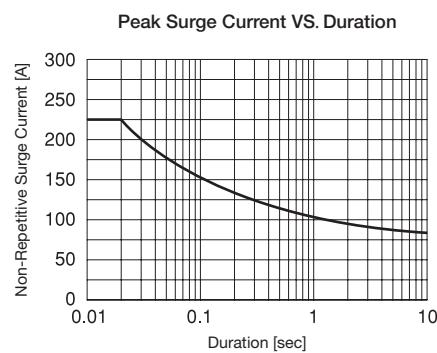


S3C-245

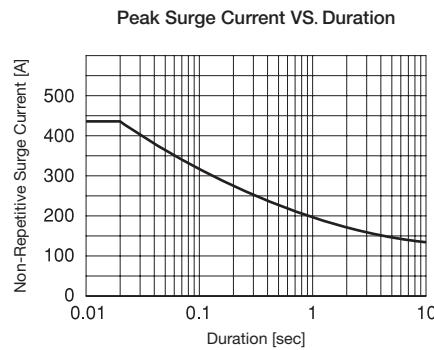

S3C-425WDV

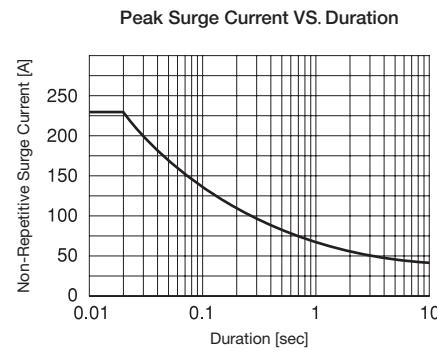


S3C-435WDV

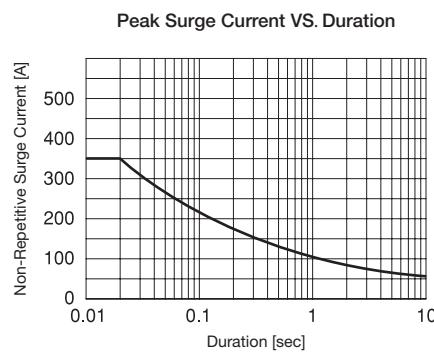


\* Description in the catalogue is subject to change without notice. Please read the specifications thoroughly before using.  
\*\* Please contact JEL SYSTEM for further information.


## S3C-2□□WDV

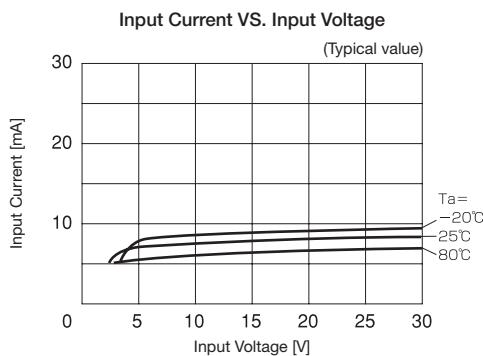


## S3C-2□□ADV

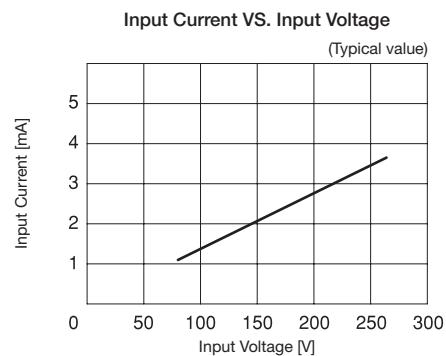


## S3C-4□□WDV

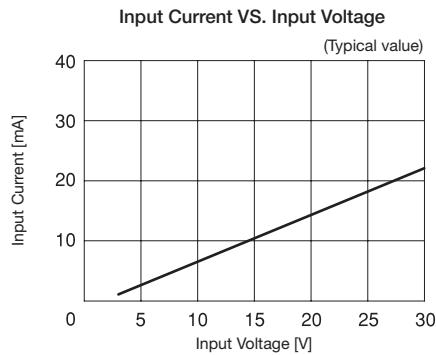


## S3C-2□□WDV

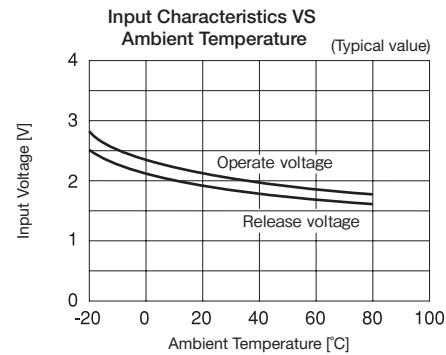

## S3C-2□□ADV

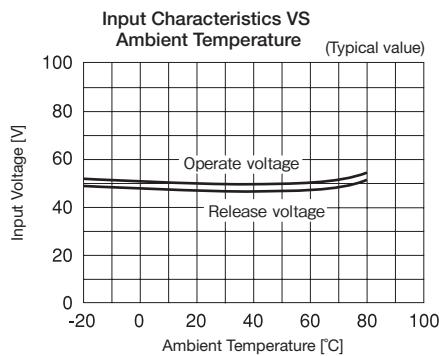




## S3C-4□□WDV

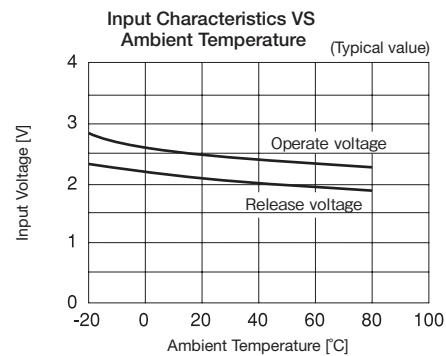


\* Description in the catalogue is subject to change without notice. Please read the specifications thoroughly before using.  
\* Please contact JEL SYSTEM for further information.

**Option****Heat-sink**

Model	JHC-41-1
SUITABLE SSR	S3C Series

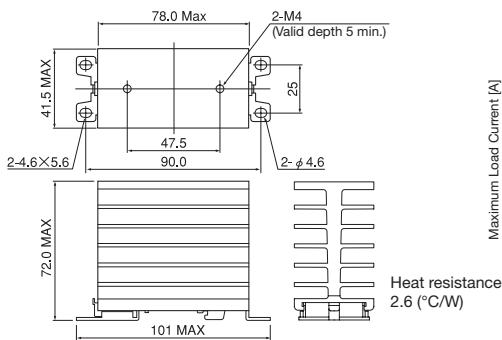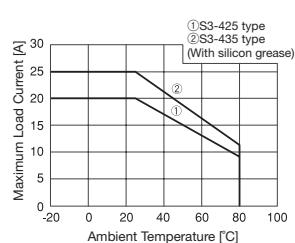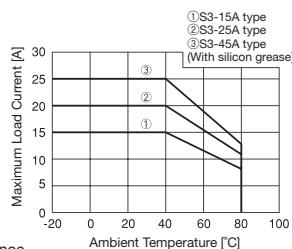**● Dimensions****● Maximum Load Current VS Ambient Temperature**

Model	JHA-□□□
SUITABLE SSR	S3C Series

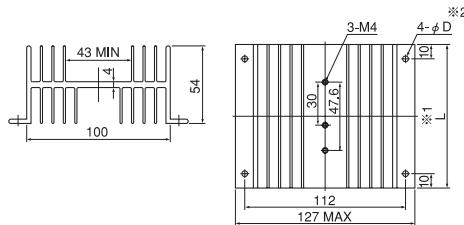**● Dimensions**

Model	Heat Resistance ("C/W)	※ 1 L (mm) Dimensions	※ 2 D (mm) Dimensions
JHA-70	1.52	70	4
JHA-100	1.14	100	4
JHA-150	1.00	150	4.5
JHA-200	0.85	200	4

\* Description in the catalogue is subject to change without notice. Please read the specifications thoroughly before using.

\* Please contact JEL SYSTEM for further information.