

The NewTek R-812 Series AC LVDTs satisfy numerous applications in which LVDT performance and reliability are required. These linear displacement sensors are available in ranges of ± 0.50 inch (± 1.27 mm) to ± 10 inches. Sensor construction consists of a coil assembly potted and mechanically swaged into a 0.812 inch (20.6mm) diameter housing with a separate moving core. The $\frac{1}{4}$ inch (6.35mm) diameter core allows a radial clearance of $\frac{1}{16}$ inch (1.58mm) between the movable core and the bore of the coil assembly. The large core-to-bore radial clearance provides for ample installation misalignments. The R-812 Series can be designed with a number of standard options including mild radiation resistance, teflon bore, metric threaded core and high temperature (400°F).

Features

- Rugged 0.812 inch stainless steel housing
- Measurement ranges from ± 0.05 to ± 10 inches
- Linearity $\pm 0.15\%$ of Full Range Typical
- Shock and vibration tolerant
- Wide operating temperature range (-65°F to 275°F)
- Choice of imperial or metric threaded core
- Standard and custom models available

Applications

- Factory Automation
- Food process control
- Materials testing
- Fluid level measurement

Electrical Specifications

Input Voltage: 3 Vrms (Nominal)

Input Frequency: 400Hz to 10KHz

Linearity: $< \pm 0.15\%$ Full Range Typical

Extended Operating Range: 1.5 X Linear Range

Null Voltage: 0.5% Full Range

Hysteresis: $< 0.01\%$ of Full Range Typical

Repeatability: $< 0.01\%$ of Full Range Typical



Environmental Specifications

Operating Temperature: -65° F to 275° F (-55° C to 135° C)

Thermal Coefficient: $< -0.01\%/^{\circ}\text{F}$ ($< -0.02\%/^{\circ}\text{C}$) of Full Range

Humidity: 90% R.H., 240 Hours

Shock Survival: 1000 g, 11 ms

Vibration: 20 g to 2 KHz

Materials Specifications

Housing: Corrosion-resistant nickel-iron alloy

Core: Hi-permeability nickel-iron alloy

Coil Form: Ceramic/Plastic

Magnet Wire: Film insulated copper

Lead Wires: # 28 AWG Teflon insulated, 12" long

NewTek Sensor Solutions, LLC

7300 US Route 130 North, Bld # 7

Pennsauken, NJ 08110-1541 USA


Tel: (856) 406-6877 Fax: (856) 406-6578

www.newteksensors.com

Specifications

Model	NT-R-812-50	NT-R-812-100	NT-R-812-200	NT-R-812-500	NT-R-812-1000	NT-R-812-2000	NT-R-812-3000	NT-R-812-4000	NT-R-812-5000	NT-R-812-7500	NT-R-812-10000
Parameter											
Nominal Range (Inches)	± 0.050	± 0.100	± 0.200	± 0.500	± 1.00	± 2.00	± 3.00	± 4.00	± 5.00	± 7.5	± 10.00
Nominal Range (mm)	± 1.25	± 2.5	± 5.0	± 12.5	± 25	± 50	± 75	± 100	± 125	± 190	± 250
Sensitivity (mV/V/.001 Inch)	6.6	4.2	2.5	0.70	0.72	0.40	0.30	0.20	0.15	0.19	0.09
Sensitivity (mV/V/mm)	264	168	100	28	29	16	12	8	6	7.6	3.6
Primary Impedance (Ω)	410	1010	1910	1410	1660	1885	1960	435	1060	1390	1060
Dimension "A" (inches)	1.15	1.8	2.55	5	6.50	10.00	12.70	15.00	17.70	22.75	30.75
Dimension "B" (inches)	0.80	1.25	1.65	3.45	3.45	5.30	6.20	6.20	6.20	7.00	9.50
Body Weight (grams)	29	41	45	82	105	140	215	275	330	475	580
Core Weight (grams)	4.2	6.0	8.2	20.2	20.2	35.0	41.8	41.8	41.8	43.0	63.0

Dimensions and Wiring

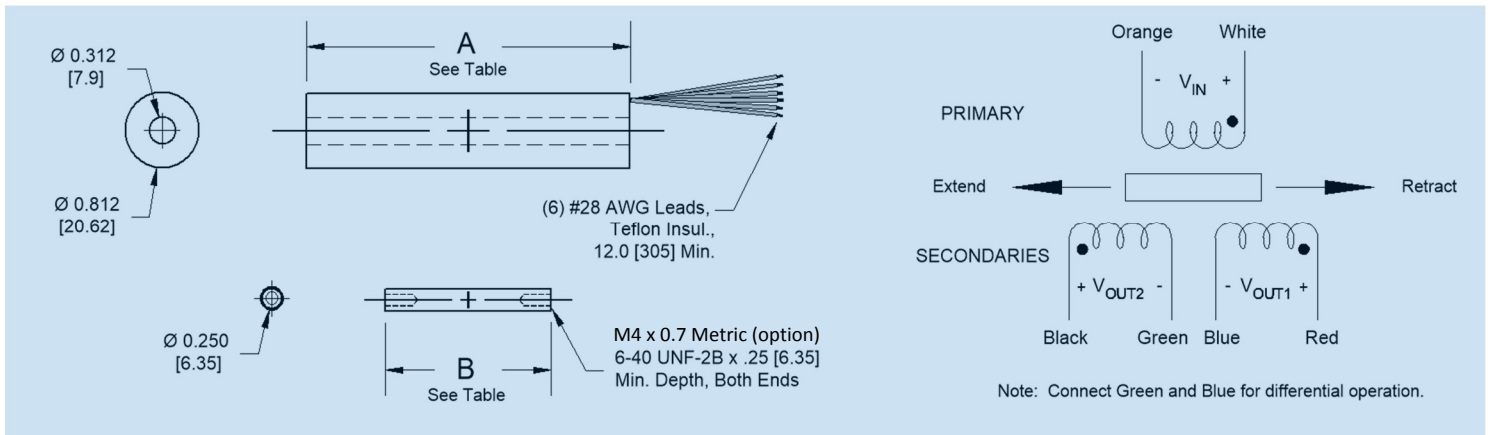

Ordering Info

NT – R – 812 – xxx – xxx

- General Purpose LVDT Series
- Range (See Table)
- Options:
 - H : 400°F Temperature
 - R : Mild Radiation Hardened
 - L : ≤ 0.1% Linearity
 - M : Metric Threads
 - [none]: Standard Product

Notes

- Electrical specifications measured at 3KHz excitation frequency.
- Additional options are available. Please consult factory for custom designs.
- Specifications subject to change.

Warranty

NewTek products are warrantied against defective materials and workmanship for a period of one year from the date of delivery to the original purchaser. NewTek accepts no liability for damages in the misuse of our products.



NewTek Sensor Solutions, LLC
 7300 US Route 130 North, Bld # 7
 Pennsauken, NJ 08110-1541 USA
 Tel: (856) 406-6877 Fax: (856) 406-6578
www.newteksensors.com